



Xelio P900A-BK Screen Replacement

Sat on your tablet and now it has this nasty crack.

Written By: Marcus Nelson



INTRODUCTION

Teaching you how to replace a crack screen.

TOOLS:

- [5mm Nut Driver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
 - [Magnetic Project Mat](#) (1)
-

Step 1 — Screen




- remove the two bottom screws the two bottom screws have a 2.44mm wide tops and are 5.44mm in

Step 2





- pry open the tablet use the blue plastic opening tools to pry apart the back cover from the screen be careful, but do not be intimidated by the sounds that the tablet will make

Step 3

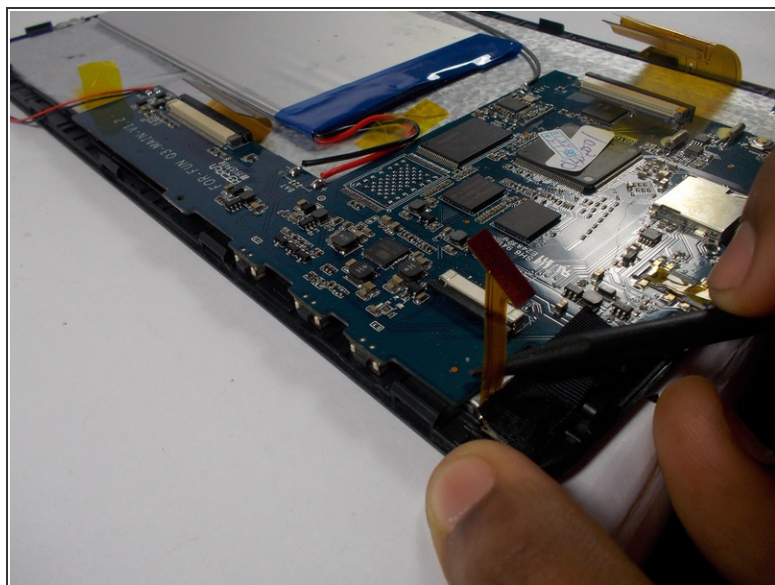


- unplug the front facing camera ribbon the ribbon is held in by the ribbon holder the small black bar on the connection to the motherboard pull the ribbon holder apart and remove the ribbon from the ribbon holder using the small plastic opening tool

Step 4

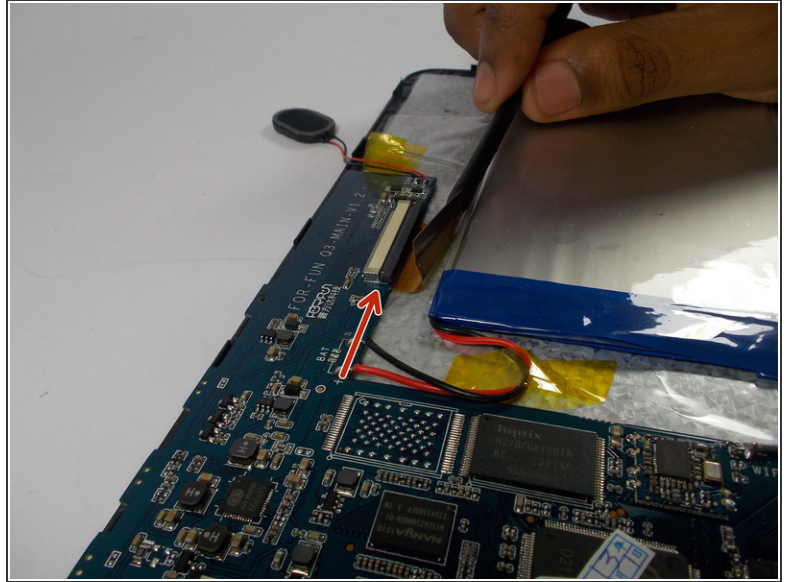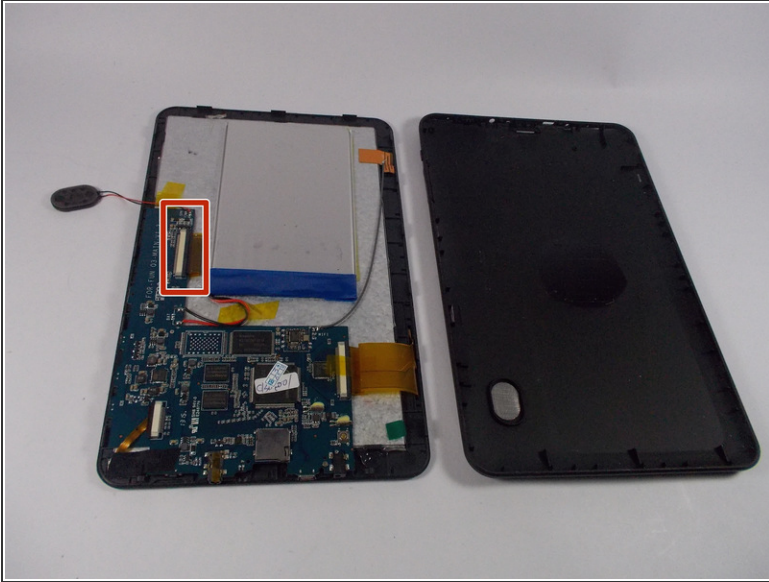


- unplug the touch screen ribbon the screen ribbon is the the larger of the two ribbons left located on the left side of the motherboard with the bottom of the tablet facing you the ribbon is held in by the ribbon holder pull the ribbon holder apart and remove the ribbon from the ribbon holder using the small plastic opening tool

Step 5

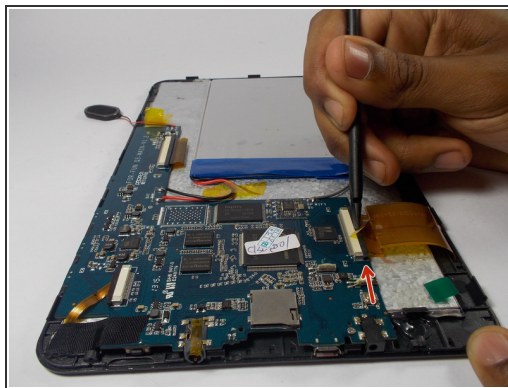

- unplug the lcd screen ribbon the last ribbon is located on the right side on the narrow end of the motherboard. the ribbon is held in by the ribbon holder the small black bar on the connection to the motherboard pull the ribbon holder apart and remove the ribbon from the ribbon holder using the small plastic opening tool

Step 6

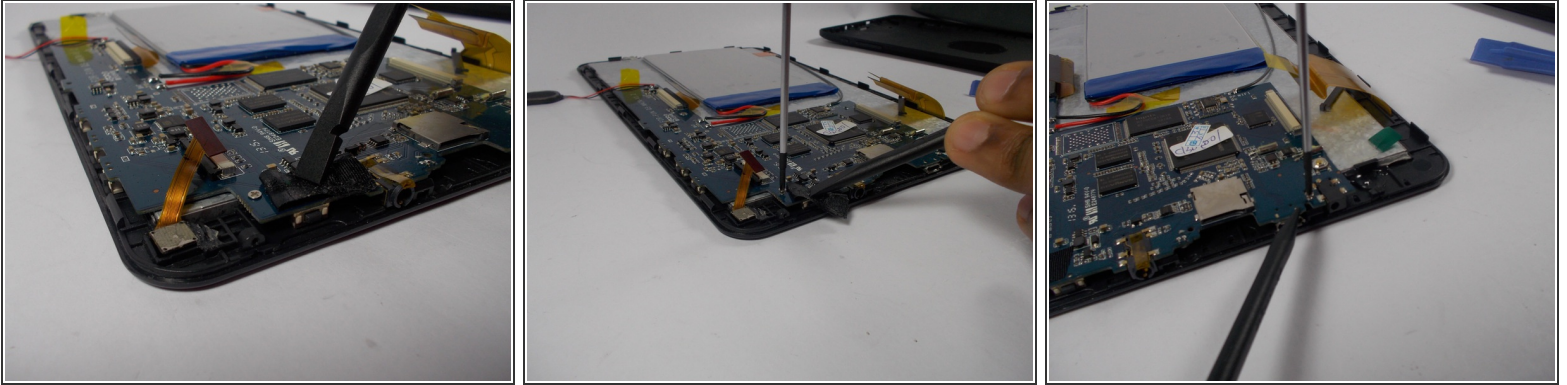



- now remove the two motherboard screws. remove the front facing camera tape to expose one of the two motherboard screws remove the second motherboard screws the screws are 2.44mm wide and 4.13mm long

Step 7



- now undo the last connection to the lcd it is located in the top right section of the tablet it is connected with a green wire and is held down by tape remove the tape holding the connection down to the plastic

Step 8

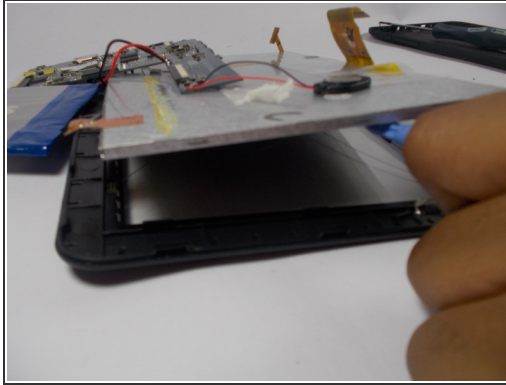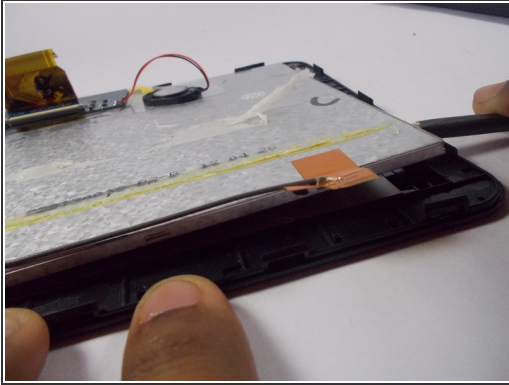

- now pry the lcd from the plastic screen holder using the small plastic opening tool begin to pry the lcd from the plastic it does require some force to actually pull the screen holder off of the lcd work all the way around until the lcd is free from the screen holder. now remove the lcd and the motherboard from the screen holder

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 06:01:23 AM.